

Nano

Luxury Vinyl Tile



DESCRIPTION

Total thickness	EN ISO 24346 (EN 428)	mm	2.0 / 2.5 / 3.0 / 4.0
Wear layer thickness	EN ISO 24340 (EN 429)	mm	0.2 / 0.3 / 0.5
Size	EN ISO 24342 (EN 427)	mm	600x600 / 450x900
Weight	EN ISO 23997	kg / sqm	3.2 / 4.0 / 5.0 / 6.0

CLASSIFICATION

Norm / product specification	-	-	EN ISO 10582 (EN 649)
	ASTM F 1700	-	Class III Type B
European classification	EN ISO 10874 (EN 685)	class	23-31
Fire rating	EN 13 501-1	class	Bfl-s1
Static Electrical Propensity	EN 1815	kV	< 2
Slip Resistance Wet	DIN 51 130	class	R10

PERFORMANCE

Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0
Wear Group	NF 189	group	T
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability ( norm)	EN ISO 23999 (EN 434)	%	≤ 0.25
Dimensional stability (average measured value)	-	%	≤ 10
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≤ 0.10
Castor chair test	ISO 4918 (EN 425)	-	No visible damage after 25000 Revolutions
Colour fastness	EN 20 105-B02	degree	≥ 6
Chemical products resistance	EN ISO 26987 (EN 423)	class	OK
Intensity of use (commercial)	ISO 10874	Class	32
Squareness and straightness	EN ISO 24342	-	<0.25mm ( Side length ≤ 400mm) <0.35mm ( Side length > 400mm)



Cell: +86-18603080392  
 Tell: +86-20-31213586  
 Web: www.relleflooring.com

2.0T  
2.5T  
3.0T  
4.0T


Nano Luxury Vinyl Tile



Nano Luxury Vinyl Tile






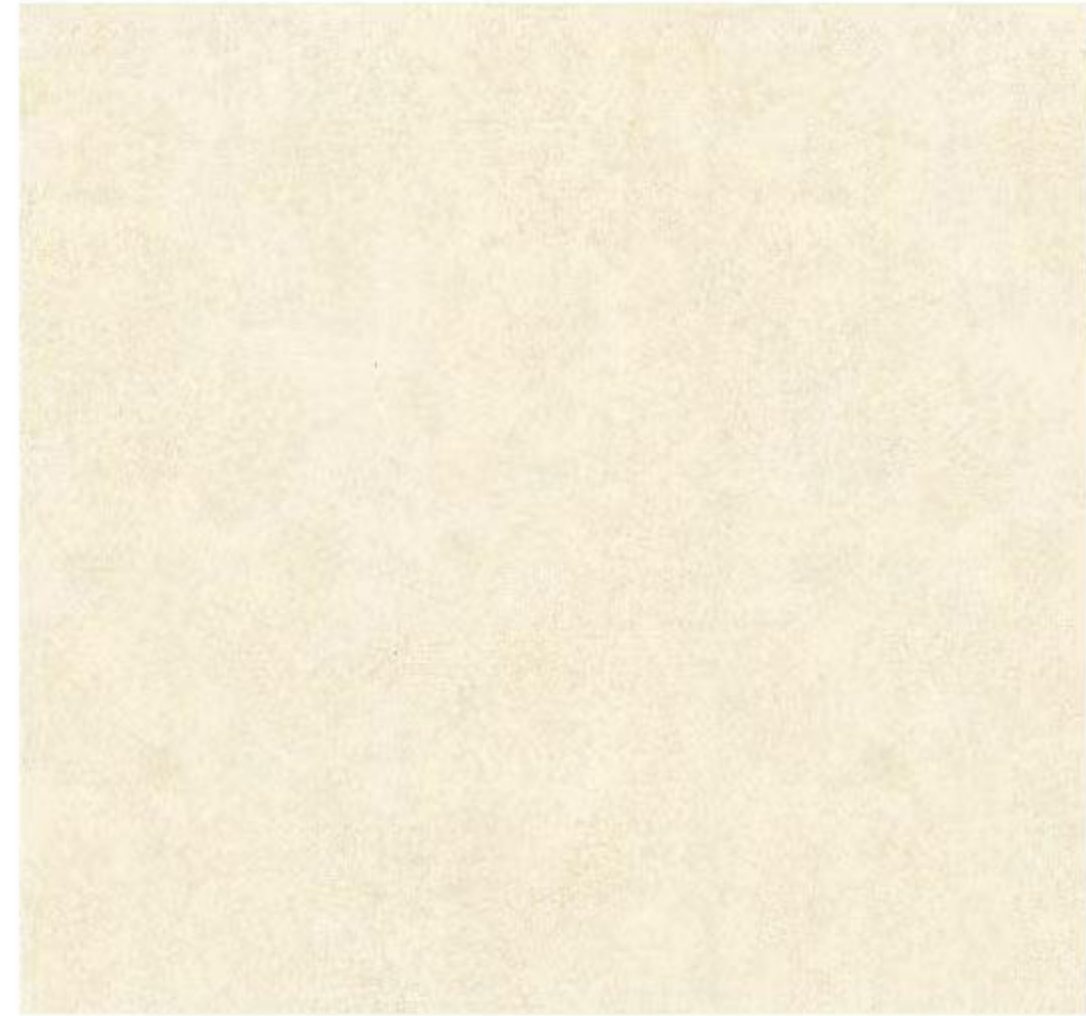


RL -201119



RL -201110

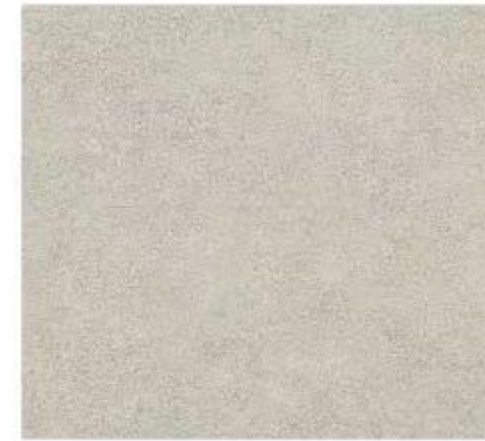

RL -201109

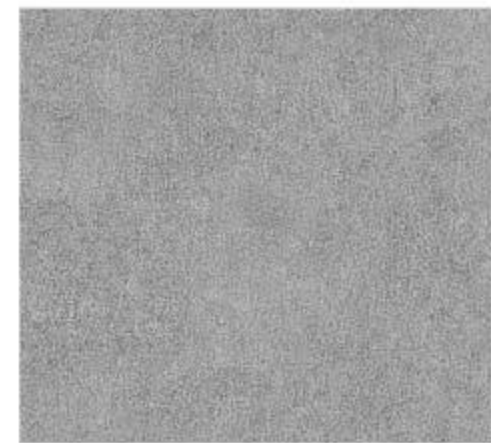

RL -201118



RL -201108




RL -201106



RL -202401



RL -202402

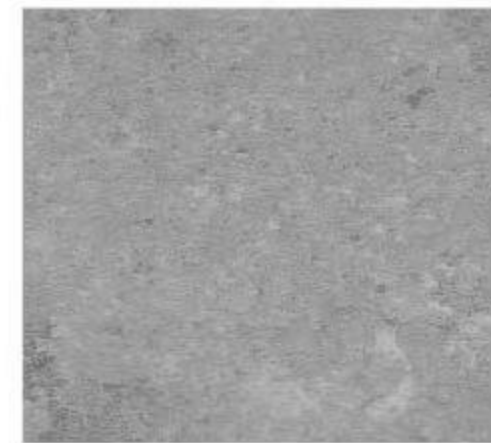


RL -202409




RL -202406




RL -202411

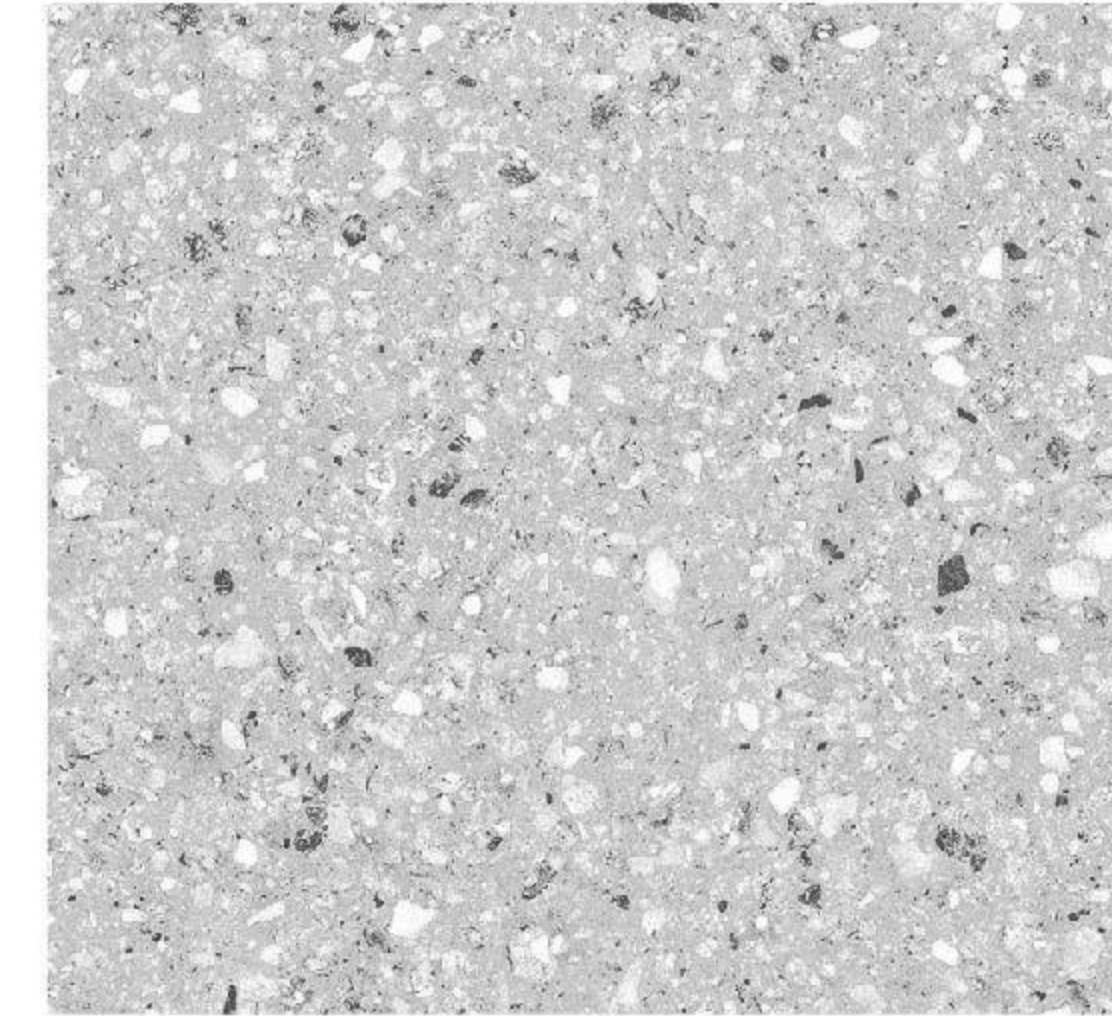

RL -204102

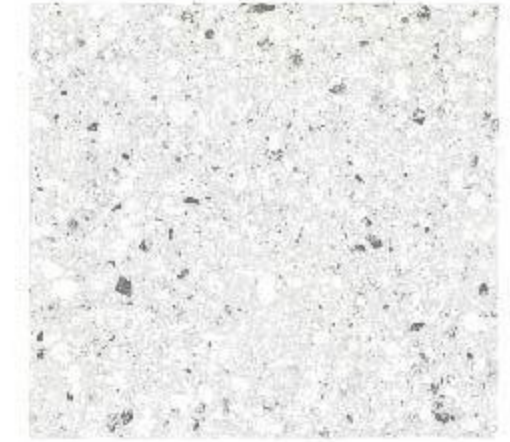

RL -204101

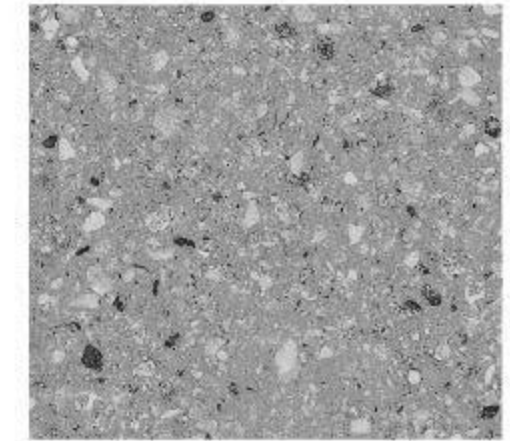

RL -204103



RL -203601



RL -203602



RL -203603

